


TECH SPECS

SERIES 2300


MODEL NO.	BTU/Hr	GAS	MINIMUM GAS LINE PRESSURE	MAXIMUM GAS LINE PRESSURE	MANIFOLD PRESSURE	WEIGHT IN LBS.	Length < A >
2312-N	23,000	NAT	6" W.C.	14" W.C.	5" W.C.	32	30 1/2"
2312-L	23,000	LP	11" W.C.	14" W.C.	10" W.C.	32	30 1/2"
2313-N	35,000	NAT	6" W.C.	14" W.C.	5" W.C.	44	43 1/2"
2313-L	35,000	LP	11" W.C.	14" W.C.	10" W.C.	44	43 1/2"
2315-N	50,000	NAT	6" W.C.	14" W.C.	5" W.C.	48	43 1/2"
2315-L	50,000	LP	11" W.C.	14" W.C.	10" W.C.	48	43 1/2"

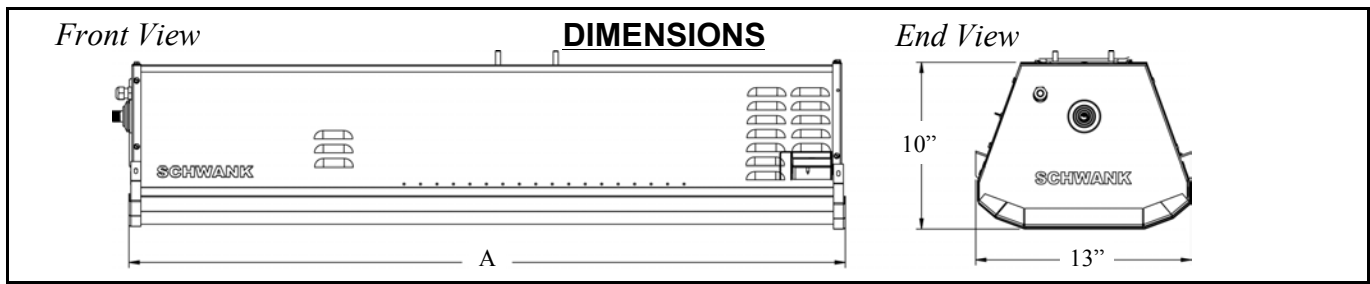


MINIMUM CLEARANCES TO COMBUSTIBLES

MODEL NO		Ends	Horizontal		30° Angle			45° Angle		
		C	D	E	F	G	H	J	K	L
2312-N/L	OUTDOOR	3"	5.5"	7"	9.5"	1"	9.5"	12.5"	1"	11.5"
2312-N/L	INDOOR	4"	8"	10"	12.5"	2.5"	14"	16"	2"	15.5"
2313-N/L	OUTDOOR	5"	7.5"	9"	9.5"	1.5"	21"	10.5"	1.5"	23"
2313-N/L	INDOOR	6"	10.5"	14.5"	14.5"	2.5"	26"	17"	2.5"	28"
2315-N/L	OUTDOOR	16"	8"	13.5"	10"	2"	21"	12.5"	2"	24.5"
2315-N/L	INDOOR	17"	11"	19"	16.5"	3"	28.5"	18.5"	3"	30"

Horizontal Mounted

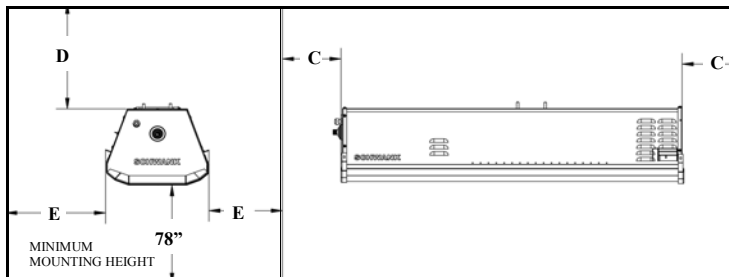

Angle Mounted 30° and 45°

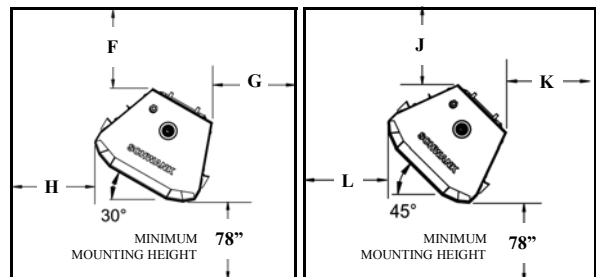

*For most perimeter mount applications, Schwank recommends a 30° mounting angle for best heating coverage - a 45° angle may direct a large portion of infrared heat above the heads of seated occupants.