




The fireplace unit can be recessed into an opening leaving the 3 3/8" depth concrete face sitting nearly flush against the wall. (There will be a 1/8" gap between the wall and the surround provided the unit is 2 3/4" out of the wall when installed)

### TECHNICAL SPECIFICATIONS

VOLTS	12	
AMPS	.2	
WATTS	10.5	
LED LIGHTS	QUANTITY	5 LED Bulbs
	WATTS	5 watts
	TOTAL WATTS	25 watts
ROTOR MOTOR	1 at 5 watts	
HEIGHT, WIDTH, DEPTH	16 5/8 x 39 3/8 x 6 5/8	
GLASS VIEWING OPENING	37 w x 10 h	
CONCRETE SURROUND	51 w x 24 h x 3 3/8 d	
SHIPPING SIZE	UNIT	40 x 7 x 22
	CONCRETE FRONT	55 x 6 x 27
SHIPPING WEIGHT	UNIT	27 lbs
	CONCRETE FRONT	90 lbs
PLUG LOCATION	Right Side	
CORD LENGTH	76"	

SERIES	MODEL	REV
BLT-IN	BLT-IN-5124-CLASSICO-VENETIANGREY BLT-IN-5124-CLASSICO-TUSCANCREAM BLT-IN-5124-MODERNO-VENETIANGREY BLT-IN-5124-MODERNO-TUSCANCREAM	1
SCALE 1" = 1'-0"	DATE: 05/20/12	SHEET 1 OF 1



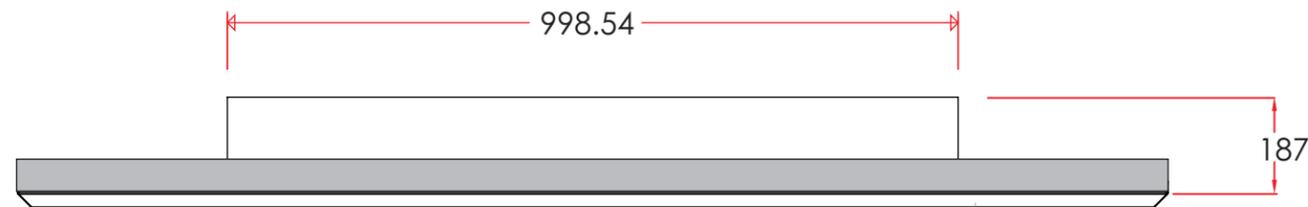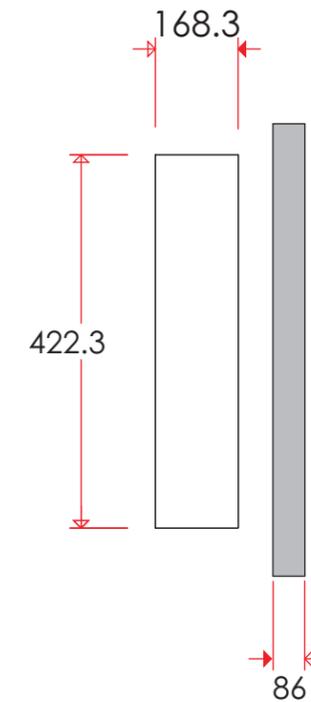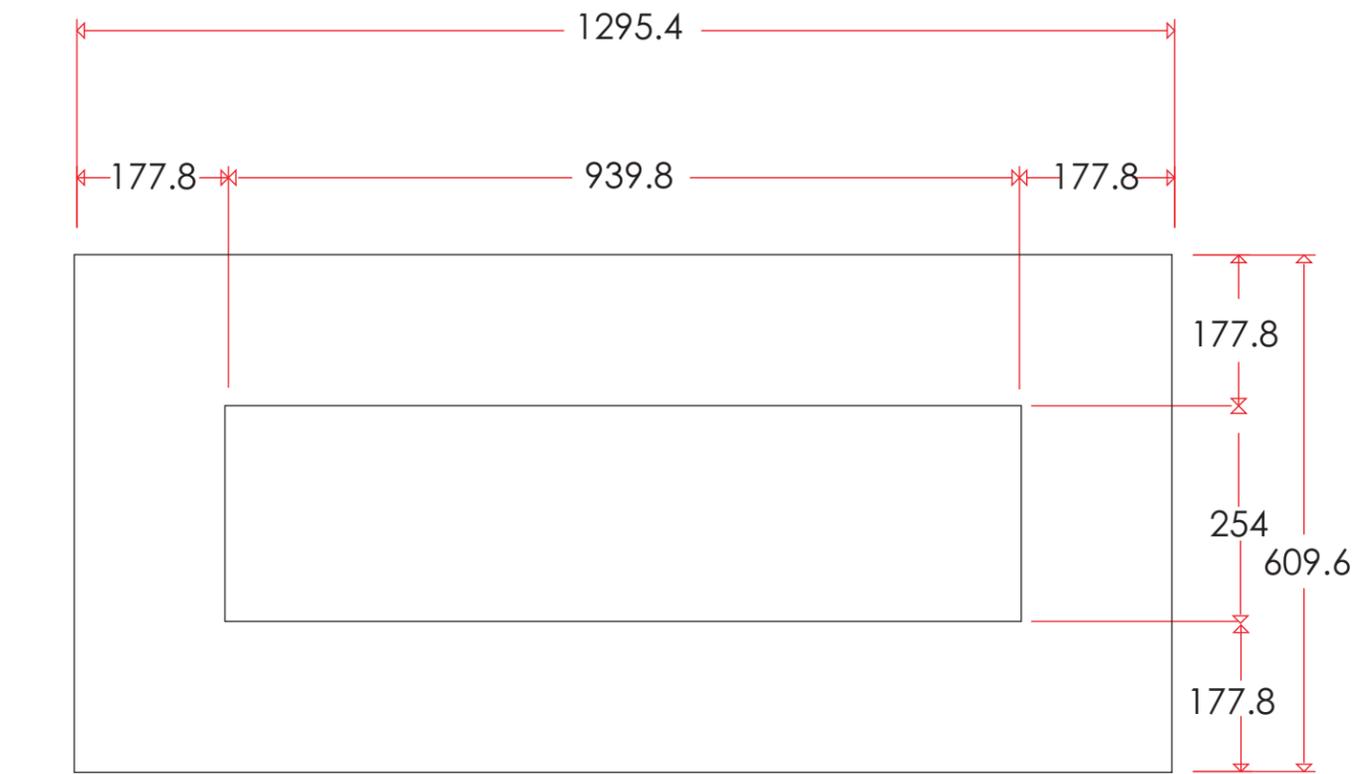

The fireplace unit can be recessed into an opening leaving the 86mm depth concrete face sitting nearly flush against the wall. (There will be a 25mm gap between the wall and the surround provided the unit is 51mm out of the wall when installed)

TECHNICAL SPECIFICATIONS		
VOLTS	12	
AMPS	.2	
WATTS	10.5	
LED LIGHTS	QUANTITY	5 LED Bulbs
	WATTS	5 watts
	TOTAL WATTS	25 watts
ROTOR MOTOR	1 at 5 watts	
HEIGHT, WIDTH, DEPTH	42.2 x 99.8 x 16.8	
GLASS VIEWING OPENING	93.98 w x 25.4 h cm	
CONCRETE SURROUND	129.5 w x 60.9 h x 8.6 cm	
SHIPPING SIZE	UNIT	101 x 18 x 56
	CONCRETE FRONT	140 x 26 x 176
SHIPPING WEIGHT	UNIT	12.25 kg
	CONCRETE FRONT	41 kg
PLUG LOCATION	Right Side	
CORD LENGTH	193 cm	



SERIES	MODEL	REV
BLT-IN	BLT-IN-5124-CLASSICO-VENETIANGREY BLT-IN-5124-CLASSICO-TUSCANCREAM BLT-IN-5124-MODERNO-VENETIANGREY BLT-IN-5124-MODERNO-TUSCANCREAM	1
SCALE 1:12	DATE: 05/20/12	SHEET 1 OF 1

